


14

(19)  **Europäisches Patentamt**  
**European Patent Office**  
**Office européen des brevets**



(11) **EP 0 531 090 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention  
of the grant of the patent:  
29.03.2000 Bulletin 2000/13

(51) Int. Cl.<sup>7</sup>: H04B 7/26, H04Q 7/36

(21) Application number: 92307923.0

(22) Date of filing: 01.09.1992

(54) **Cells re-use partition in a mobile communication system**

Zellen-Wiederholungsmuster in einem Mobil-Kommunikationssystem

Motif de réutilisation pour cellules dans un système de communication mobile

(84) Designated Contracting States:  
DE FR GB

(30) Priority: 03.09.1991 JP 24841391

(43) Date of publication of application:  
10.03.1993 Bulletin 1993/10

(73) Proprietors:  
• NIPPON TELEGRAPH AND TELEPHONE  
CORPORATION  
Shinjuku-ku, Tokyo 163-19 (JP)  
• NTT MOBILE COMMUNICATIONS NETWORK  
INC.  
Minato-ku, Tokyo 105-8436 (JP)

(72) Inventors:  
• Fujii, Teruya  
Yokosuka-shi, Kanagawa-ken (JP)  
• Sakamoto, Masayuki  
Yokosuka-shi, Kanagawa-ken (JP)

(74) Representative:  
Skone James, Robert Edmund  
GILL JENNINGS & EVERY  
Broadgate House  
7 Eldon Street  
London EC2M 7LH (GB)

(56) References cited:  
EP-A- 0 297 062                      US-A- 4 242 538  
US-A- 5 040 238

- PATENT ABSTRACTS OF JAPAN vol. 005, no. 137 (E-072)29 August 1981
- ELECTRONICS AND COMMUNICATION ENGINEERING JOURNAL vol. 3, no. 4, August 1991, LONDON GB pages 149 - 158 BEDDOES 'UK cellular radio developments'
- IEEE TRANSACTIONS ON VEHICULAR TECHNOLOGY vol. 20, no. 3, August 1971, US pages 75 - 79 PORTER 'Supervision and Control features of a Small-Zone Radiotelephone System'
- PATENT ABSTRACTS OF JAPAN vol. 016, no. 236 (E-1210)29 May 1992
- PATENT ABSTRACTS OF JAPAN vol. 016, no. 031 (E-1159)27 January 1982

EP 0 531 090 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

## Description

[0001] The present invention relates to a mobile communication system, in particular, relates to structure of cells in such communication system.

[0002] Fig.1 shows cells in a mobile communication system, in which the same channels are re-used with some spacing. The thick line in Fig.1 shows a unit of a cluster. Each hexagon shows a cell, and a numeral in a cell shows a channel. The same numerals show the same channels which use the same frequency. The same channel or the same frequency is re-used in a cell in another cluster. The structure of a cell may be either an omni-cell as shown in Fig.2A in which a base station having a non-directional antenna is located around center of a cell, or a sector cell as shown in Fig.2B in which a directional antenna divides an area into a plurality of sector cells each of which is assigned a specific channel or frequency.

[0003] A re-use partition considers a virtual small cell, which uses the same frequency with the shorter spacing than that of cells. The re-use technique increases the spectrum efficiency in a mobile communication system.

[0004] An idea of re-use partition is described in accordance with Fig.3. Fig.3A shows an example of the use of the same frequency. A circled line shows a cell, a symbol (+) shows a base station around center of a cell, a figure (1,2,3) shows a channel number, and d shows the spacing of the use of the same frequency. The same figure (1,2 or 3) shows the same channel or the same frequency. In the example of Fig.3A, the spacing of the same channels is three cells ( $d=3$ ).

[0005] Fig.3B and Fig.3C show a typical re-use partition. Fig.3B shows the spacing of outer cells, and Fig.3C shows the spacing of inner cells, when virtual cells are introduced to the cell layout in Fig.3A. As shown in Fig.3B, the spacing of outer cells is three cells ( $d=3$ ) which is the same as that of Fig.3A, on the other hand, the spacing of inner cells is two cells ( $d=2$ ) in the example of Fig.3C. Since the spacing or the spectrum efficiency of inner cells is improved by re-use partition, the total efficiency of the use of frequencies is improved. The spacing or the efficiency of inner cells is improved by improving a cell selection accuracy to determine which cell (outer cell or inner cell) a mobile station locates.

[0006] In a prior re-use partition system, a control channel for mobile communication for connection et al is common to both an outer cell and an inner cell. In other words, both an outer cell and an inner cell are handled as a single control cell. As shown in Fig.4, a control channel for access is used commonly to outer cells and inner cells, and a speech channel has a specific transmitter for each outer cell and each inner cell.

[0007] In Fig.4, an antenna is used commonly in outer channels, and inner channels. A plurality of transceivers ( $TRX_{out}$ ) for outer cells, and a plurality of transceivers

( $TRX_{in}$ ) for inner cells, and a single common controller channel transceiver (TRX) are coupled with said antenna through an antenna multiplexer. Those transceivers are coupled with the base station control, and the communication channels (external channels).

[0008] Accordingly, a prior re-use partition system in a mobile communication system has the disadvantages as follows.

[0009] First, a mobile station must be located to determine whether it is either in an inner cell or an outer cell in every access and during speech. If the decision is effected based upon received level at a base station, operational load of a base station increases since the decision must be effected in a short time in connection time, and/or said decision must be always carried out during speech.

[0010] Further, if the decision is carried out merely whether received level exceeds a predetermined threshold level or not, the decision would not be accurate due to fading which is specific to mobile communication. In that case, it would be determined incorrectly as if a mobile station located in an inner cell merely because received level is high, while the mobile station located in an outer cell, and would increase undesirable interference.

[0011] JP-A-56072547 describes a frequency scanning omni-beam radio communication system in which the service area is divided into a number of concentric regions each being assigned a different communication frequency.

[0012] EP-A-0297062 describes a mobile radio communication system with overlaid channel re-use patterns.

[0013] In accordance with the present invention, a mobile communication system having a plurality of radio cells for a service area, each cell being assigned a respective channel, and the same channel being used in a plurality of cells which are spaced apart from each other by more than a predetermined spacing comprising: a first small cell provided in a radio cell by a first antenna provided in a base station; and a second small cell, which is smaller than said first small cell, provided in said first small cell by a second antenna provided in a base station; wherein the spacing between second small cells using the same channel is smaller than the spacing between first small cells using the same channel, characterised in that the first and second antennas are provided in the same base station, wherein the first and second small cells have respective control channels, and wherein communication between a mobile station and a base station is effected using the communication or control channel of the one of the first and second small cells having a higher received level when received and measured at either the mobile station or the base station.

[0014] The present invention overcomes the disadvantages and limitations of a prior mobile communication system by providing a novel and improved mobile

communication system.

[0015] The present invention also provides a mobile communication system which reduces operation load of a base station, and improves effect of re-use partition of cells.

[0016] The foregoing and other objects, features, and attendant advantages of the present invention will be appreciated as the same become better understood by means of the following description and accompanying drawings wherein:

Fig.1 shows structure of small cells,  
 Fig.2 shows an omni-cell and a sector cell,  
 Fig.3 shows an explanatory drawing of a re-use partition,  
 Fig.4 is a block diagram of a base station in a prior art,  
 Fig.5 shows a first embodiment according to the present invention,  
 Fig.6 shows a second embodiment according to the present invention,  
 Fig.7 shows a base station of a third embodiment according to the present invention,  
 Fig.8 shows a cell of a fourth embodiment according to the present invention,  
 Fig.9 shows a cell of a fifth embodiment according to the present invention,  
 Fig.10 shows a cell of a sixth embodiment according to the present invention,  
 Fig.11 shows a system configuration of another embodiment according to the present invention,  
 Fig.12 shows a system configuration of still another embodiment according to the present invention,  
 Fig.13 shows a system configuration of still another embodiment according to the present invention,  
 Fig.14 shows still another embodiment according to the present invention,  
 Fig.15 shows a base station of still another embodiment according to the present invention,  
 Fig.16 shows still another embodiment according to the present invention,  
 Fig.17 shows a control flow in still another embodiment according to the present invention,  
 Fig.18 shows a control flow in still another embodiment according to the present invention,  
 Fig.19 shows a base station which simplifies an antenna structure, and  
 Fig.20 shows a base station which provides each small cells independently.

[0017] Fig.5A shows a block diagram of a base station according to the present invention, in which it is assumed that a base station has two antennas having the directivities  $\theta_{in}$  and  $\theta_{out}$  in vertical plane so that two different cells are obtained. Those cells are referred as an inner cell and an outer cell. And, the respective base stations are called as an inner base station, and an outer base station.

[0018] In Fig.5A, an inner base station relating to the inner cell has a plurality of transceivers ( $TRX_{in}$ ) and a control channel transceiver ( $TRX$ ) coupled with the inner antenna through the antenna multiplexer. An outer base station relating to the outer cell has also a plurality of transceivers ( $TRX_{out}$ ) and a control channel transceiver ( $TRX$ ) coupled with the outer antenna through the antenna multiplexer. Those base stations are coupled with the common base station controller, and the external communication channels.

[0019] First, the structure of the cells is described in accordance with Fig.5B, in which the numeral 10<sub>1</sub> and 10<sub>2</sub> are an antenna, 20 is an inner cell, and 30 is an outer cell.

[0020] As shown in Fig.5B, the tilt angle of the antenna of the inner cell base station is  $\theta_{in}$ , and the tilt angle of the antenna of the outer base station is  $\theta_{out}$ .

[0021] Fig.5C shows an example of received level when  $\theta_{in} > \theta_{out}$  is satisfied, where it is assumed that two antennas for an inner cell and an outer cell have the same directivity (gain), the same antenna height, the same feeder loss, and the same transmit power as each other.

[0022] It should be appreciated in Fig.5C that when the distance between a base station and a mobile station is small, the received level for the antenna with larger tilt angle is higher than that of the other antenna, and that when the distance between a base station and a mobile station is large, the received level for the antenna with larger tilt angle is lower than that of the other antenna.

[0023] An antenna with large tilt angle provides high received level near a base station, since large tilt angle antenna concentrates radiation power near the base station, as shown in Fig.5B.

[0024] Therefore, it should be noted that two cells (an inner cell and an outer cell) which can be separated based upon received level are essentially provided according to the angle of an antenna.

[0025] Fig.5D shows a received level of an inner cell (curve A) and an outer cell (curve B). It should be noted that the border of an inner cell and an outer cell is clear, and a mobile station can select an inner cell or an outer cell accurately. Therefore, the spectrum efficiency is improved.

[0026] Fig.6A shows a block diagram of a base station of the second embodiment according to the present invention. The feature of that embodiment is that a directivity  $G_{in}$  or  $G_{out}$  is obtained by tilting an antenna. An antenna with the tilt angle  $\theta_{in}$  is used for the directivity  $G_{in}$ , and an antenna with the tilt angle  $\theta_{out}$  is used for the directivity  $G_{out}$ .

[0027] Fig.6B shows mechanical embodiment for providing a tilt antenna. A first antenna 10<sub>1</sub> has the same directivity in vertical plane as that of a second antenna 10<sub>2</sub>, and the first antenna is fixed so that the main beam is directed to the direction  $\theta_{out}$ , and the second antenna is fixed so that the main beam is directed to the direction

$\theta_n$ .

[0028] Fig.6C shows electrical embodiment of a tilt antenna, which is a phased-array antenna, and has a plurality of antenna elements (a), (b), (c), together with related phase shifters ( $P_a$ ,  $P_b$ ,  $P_c$ ) and a power divider H. The phase shifters are adjusted so that the main beam of the antenna is directed to the angle  $\theta_{out}$  or  $\theta_n$ . The phase shift in each phase shifter is accomplished in conventional manner, for instance, by designing the length of a feeder cable, or by using a specific phase shifter.

[0029] When the tilt angle  $\theta_n$  of the second antenna is large, the received level outside of an area is decreased considerably, therefore, the interval of the use of the same frequency may be shortened while keeping the area of a second small cell constant. For instance, while the interval of the reuse of the same frequency in a prior art is two cells, the interval of the present invention may be one cell. That means that the same frequency may be used in an adjacent small cell.

[0030] Fig.7A shows a block diagram of a base station of third embodiment. The feature of this embodiment as compared with that of Fig.5A is that a power controller is, for example, provided between an antenna and an antenna multiplexer for each of a first base station and a second base station so that transmit power of a control channel and a speech channel are controllable. The adjustment of transmit power is effected either for each transmitter, or for all the transmitters of all the speech channels and the control channel. Fig.7A shows the embodiment that the transmit power of all the transmitters is adjusted at the same time.

[0031] When the border of a first small cell and a second small cell is unclear as shown in Fig.7B(a) in which the received level of a first antenna is close to that of a second antenna around the border, the transmit power of the second antenna is adjusted so that it is higher than that of the first antenna. Then, the received level of the first antenna is clearly distinguished from that of the second antenna, as shown in Fig.7B(b).

[0032] Thus, it should be noted that the adjustment of transmit power clarifies the difference of the received level of the first antenna from that of the second antenna around the border. Therefore, the selection of a cell is carried out accurately, and the frequency may be used effectively.

[0033] Of course, it should be appreciated that the idea of Fig.7 may be used in the embodiment of Fig.6.

[0034] Fig.8 shows a structure of small cells, in which the horizontal directivity of a first small cell and a second small cell is provided by using a non-directional (in horizontal plane) antenna, or an omni-antenna. A second small cell overlays with a first small cell, and is provided within the first small cell.

[0035] Fig.9 shows another structure of small cells, in which both a first antenna and a second antenna are directional antennas in horizontal plane. Fig.9 shows the embodiment that both antennas are sector anten-

nas of 120°. A second small cell may overlay with a first small cell, and is provided within the first small cell.

[0036] Fig.10 shows still another structure of small cells, in which a first small cell is provided by a directional antenna (for instance a sector antenna), and a second small cell is provided by a non-directional antenna (omni-antenna). A second small cell may overlay with a first small cell, and is provided within the first small cell. As a second small cell is smaller than a first small cell, when a second small cell is provided by a non-directional antenna, the number of hand-over of cells in a mobile station may be small because the crossing rate among the sectorized cells is reduced when a mobile station moves around a base station.

[0037] Fig.11 shows a modification of the present invention. The feature of Fig.11 is that the selection of small cells is carried out in a mobile station by comparing two received levels of two speech channels or control channels. So, a mobile station has a comparator, which compares a first received level of first frequency  $f_1$  and a second received level of second frequency  $f_2$  so that the small cell which provides higher received level is selected.

[0038] Fig.12 shows another modification of the present invention. The feature of Fig.12 is that the selection of small cells is carried out in a base station by comparing received level of control channel or speech channel. A mobile station transmits a single frequency  $f_1$ , and a base station receives by using two antennas, a first antenna relating to a first small cell, and a second antenna relating to a second small cell. A comparator in a controller in a base station compares those two receive levels, and takes the higher received level so that the small cell which provides the higher received level is selected. The embodiment of Fig.12 is advantageous in that a control channel may be common to both a first small cell and a second small cell, and therefore, the spectrum efficiency for a control channel is improved.

[0039] Fig.13 shows still another modification of the present invention. The feature of Fig.13 is that the selection of small cells is carried out by a mobile station by comparing two received levels of control channels of the frequencies  $f_1$  and  $f_2$ . A mobile station has a comparator for that purpose.

[0040] Fig.14A shows still another modification of the present invention. The feature of this embodiment is that the selection of small cells is carried out by a base station which compares received levels of control channels. A mobile station transmits a single frequency  $f_1$  as a control channel, which is received by using two antennas in a base station. The received level by a first antenna and the receive level by a second antenna are compared in a comparator in a controller of a base station, and the higher received level relating to a preferable small cell is selected.

[0041] Fig.14B is the modification of a base station of this embodiment, and has the feature that a base sta-

tion has a common control channel transmitter which is provided for a first antenna to cover all the small cells, and a plurality of control channel receivers for each small cells.

[0042] Fig.14C is another modification of a base station, and has the feature that a transmitter (TX) for a control channel is provided, and a receiver (RX<sub>in</sub>, RX<sub>out</sub>) for a control channel is provided for each of a first antenna and a second antenna. As a control channel is common to a first small cell and a second small cell, the spectrum efficiency of a control channel is improved in this embodiment.

[0043] Fig.15 shows a base station of still another embodiment according to the present invention, and has the feature that a base station has a pair of additional receivers SRX<sub>in</sub> and SRX<sub>out</sub>. The former receiver measures the received level of a speech channel in an outer small cell, and the latter receiver measures the received level of a speech channel in an inner small cell. The controller of a base station compares the received level of the current small cell with the received level measured by said SRX to determine the location of a mobile station. For instance, if the SRX level by a second antenna is higher than a received level by a first antenna for a speech channel, the base station determines that the mobile station moves from a first small cell to a second small cell, and that hands over from a first small cell to a second small cell.

[0044] Figs.16A, 16B and 16C show still another embodiment of the present invention, and have the feature that a third small cell relating to a third antenna is provided within a second small cell. As the third small cell may use the same frequency with the interval shorter than that of a second small cell, the spectrum efficiency is further improved.

[0045] Fig.17 is an operational flow chart of still another embodiment according to the present invention. The feature of Fig.17 is that a mobile station staying in a second small cell uses a channel which is assigned to a first small cell, when all the channels assigned to a second small cell are full. It should be noted that this is no problem in interference, and it can solve the problem of a short time busy condition.

[0046] Fig.18 shows the modification of the embodiment of Fig.17, and the feature of Fig.18 is that when a mobile station staying in a second small cell uses a channel assigned to a first small cell according to the embodiment of Fig.17, and a channel in a second small station becomes available, the mobile station is handed over from the first small cell channel to the second small cell channel. This provides the desirable interval of the use of the same frequency as expected to second small cells. The combination of the channel switching by hand-over, and the busy control in the present embodiment provides not only the improvement of re-use partition on spatial domain, but also the improvement of re-use partition on time domain.

[0047] Fig.19 shows a block diagram of a base station

of still another embodiment, and has the feature that a single antenna is used commonly to both a first antenna and a second antenna by coupling the single antenna with two transceivers for a first small cell and a second small cell.

[0048] Fig.20 shows a block diagram of a base station of still another embodiment of the present invention, and has the feature that a control in a base station is provided for each small cells. In this case, each small cell base station located on the same location functions as an independent base station.

[0049] As mentioned above in detail, according to the present invention, a base station includes a plurality of small base stations each having a specific antenna tilt angle and/or specific transmit power, providing a specific small cell. Thus, an inner cell is provided independently from an outer cell so that the spectrum efficiency in an inner cell is higher than that of an outer cell. The present invention can locate a mobile station more accurately in an outer cell or an inner cell as compared with a prior art which locates a mobile station merely according to receive level with no tilted antenna.

[0050] From the foregoing it will now be apparent that a new and improved mobile communication system has been found. It should be understood of course that the embodiments disclosed are merely illustrative and are not intended to limit the scope of the invention. Reference should be made to the appended claims, therefore, for indicating the scope of the invention rather than the specification.

#### Claims

1. A mobile communication system having a plurality of radio cells for a service area, each cell being assigned a respective channel, and the same channel being used in a plurality of cells which are spaced apart from each other by more than a predetermined spacing comprising: a first small cell (30) provided in a radio cell by a first antenna (10<sub>1</sub>) provided in a base station; and a second small cell (20), which is smaller than said first small cell (30), provided in said first small cell (30) by a second antenna (10<sub>2</sub>) provided in a base station; wherein the spacing between second small cells using the same channel is smaller than the spacing between first small cells using the same channel, characterised in that the first and second antennas are provided in the same base station, wherein the first and second small cells have respective control channels, and wherein communication between a mobile station and a base station is effected using the communication or control channel of the one of the first and second small cells having a higher received level when received and measured at either the mobile station or the base station.
2. A mobile communication system according to claim

- 1, wherein each of said first antenna (10<sub>1</sub>) and said second antenna (10<sub>2</sub>) is a beam tilt antenna having a respective beam tilt angle ( $\theta_{in}, \theta_{out}$ ).
3. A mobile communication system according to claim 1 or claim 2, wherein effective input power to an antenna depends upon each antenna (10<sub>1</sub>, 10<sub>2</sub>) for each small cell (20,30).
4. A mobile communication system according to any preceding claim, wherein said first small cell (30) and said second small cell (20) are in omni-structure.
5. A mobile communication system according to any of claims 1 to 3, wherein said first small cell (30) and said second small cell (20) are in sector structure.
6. A mobile communication system according to any of claims 1-3, wherein said first small cell (30) is in sector structure, and said second small cell (20) is in omni-structure.
7. A mobile communication system according to any preceding claim, wherein comparison of received levels of two channels relating to each small cell (30,20) and selection of small cells are carried out in a mobile station.
8. A mobile communication system according to claim 7, wherein selection of small cells (30,20) is effected based upon received level of a control channel provided for each small cell.
9. A mobile communication system according to any of claims 1 to 6, wherein comparison of received levels of two channels relating to each small cell and selection of small cells are carried out in a base station.
10. A mobile communication system according to claim 9, wherein selection of small cells (30,20) is effected in a base station based upon received level of a control channel which is common to each small cell.
11. A mobile communication system according to claim 9, wherein selection of small cells (30,20) is effected in a base station upon received level of a speech channel.
12. A mobile communication system according to any preceding claim, wherein a third antenna provides a third small cell within said second small cell, a third speech channel and a third control channel are provided, and communication is carried out by using the highest receive level of three channels.

13. A mobile communication system according to any preceding claim, wherein when all the channels in a second small cell are full and some of the channels in a first small cell are available, a channel in a first small cell is assigned to a mobile station which stays in a second small cell.

#### Patentansprüche

1. Mobil-Kommunikationssystem mit einer Vielzahl von Funkzellen für ein Servicegebiet, wobei jeder Zelle ein eigener Kanal zugeordnet ist und der gleiche Kanal in einer Vielzahl von Zellen benutzt wird, die um mehr als einen vorbestimmten Abstand auseinander liegen und das Mobil-Kommunikationssystem aufweist: eine erste kleine Zelle (30), die in einer Funkzelle durch eine erste Antenne (10<sub>1</sub>) einer Basisstation gebildet wird; und eine zweite kleine Zelle (20), die kleiner als die erste kleine Zelle (30) ist und in der ersten kleinen Zelle (30) durch eine zweite Antenne (10<sub>2</sub>) einer Basisstation gebildet wird; wobei der Abstand zwischen zweiten kleinen Zellen, die den gleichen Kanal benutzen, kleiner als der Abstand zwischen ersten kleinen Zellen ist, die den gleichen Kanal benutzen, dadurch gekennzeichnet, daß die erste und die zweite Antenne in der gleichen Basisstation vorgesehen sind, wobei die ersten und die zweiten kleinen Zelle eigene Steuerkanäle haben und wobei die Kommunikation zwischen einer Mobilstation und einer Basisstation durch Benutzung des Kommunikations- oder Steuerkanals einer der ersten und der zweiten Zellen bewirkt wird, die einen höheren an entweder der Mobilstation oder der Basisstation empfangenen und gemessenen Empfangspegel hat.
2. Mobil-Kommunikationssystem nach Anspruch 1, bei dem sowohl die erste Antenne (10<sub>1</sub>) als auch die zweite Antenne (10<sub>2</sub>) eine Strahlneigungs-Antenne mit jeweils einem Strahlneigungswinkel ( $\theta_{in}, \theta_{out}$ ) ist.
3. Mobil-Kommunikationssystem nach Anspruch 1 oder 2, bei dem die effektive Eingangsleistung einer Antenne von jeder Antenne (10<sub>1</sub>, 10<sub>2</sub>) jeder kleinen Zelle (20, 30) abhängt.
4. Mobil-Kommunikationssystem nach einem der vorstehenden Ansprüche, bei dem die erste kleine Zelle (30) und die zweite kleine Zelle (20) einen Rundstrahl Aufbau haben.
5. Mobil-Kommunikationssystem nach einem der Ansprüche 1 bis 3, bei dem die erste kleine Zelle (30) und die zweite kleine Zelle (20) einen Sektor-Aufbau haben.

6. Mobil-Kommunikationssystem nach einem der Ansprüche 1 bis 3, bei dem die erste kleine Zelle (30) einen Sektor-Aufbau und die zweite kleine Zelle (20) einen Rundstrahl-Aufbau hat.

7. Mobil-Kommunikationssystem nach einem der vorstehenden Ansprüche, bei dem der Vergleich der Empfangspegel zweier Kanäle, die jeder kleinen Zelle (30, 20) zugeordnet sind, und die Auswahl der kleinen Zellen in einer Mobilstation ausgeführt werden.

8. Mobil-Kommunikationssystem nach Anspruch 7, bei dem die Auswahl kleiner Zellen (30, 20) in Abhängigkeit vom Empfangspegel eines für jede kleine Zelle vorgesehenen Steuerkanals bewirkt wird.

9. Mobil-Kommunikationssystem nach einem der Ansprüche 1 bis 6, bei dem der Vergleich der Empfangspegel zweier Kanäle, die jeder kleinen Zelle zugeordnet sind, und die Auswahl kleiner Zellen in einer Basisstation ausgeführt werden.

10. Mobil-Kommunikationssystem nach Anspruch 9, bei dem die Auswahl kleiner Zellen (30, 20) in einer Basisstation in Abhängigkeit vom Empfangspegel eines allen kleinen Zellen gemeinsamen Steuerkanals bewirkt wird.

11. Mobil-Kommunikationssystem nach Anspruch 9, bei dem die Auswahl kleiner Zellen (30, 20) in einer Basisstation in Abhängigkeit vom Empfangspegel eines Sprachkanals bewirkt wird.

12. Mobil-Kommunikationssystem nach einem der vorstehenden Ansprüche, bei dem eine dritte Antenne eine dritte kleine Zelle in der zweiten kleinen Zelle bildet, ein dritter Sprachkanal und ein dritter Steuerkanal vorgesehen sind und die Kommunikation durch Benutzung des höchsten Empfangspegels der drei Kanäle ausgeführt wird.

13. Mobil-Kommunikationssystem nach einem der vorstehenden Ansprüche, bei dem, wenn alle Kanäle in einer zweiten kleinen Zelle belegt und einige der Kanäle in einer ersten kleinen Zelle verfügbar sind, ein Kanal in einer ersten kleinen Zelle einer Mobilstation zugeordnet wird, die in einer zweiten kleinen Zelle bleibt.

#### Revendications

1. Système de communication mobile comprenant une pluralité de cellules radio pour une zone desservie, chaque cellule étant affectée à un canal respectif, et le même canal étant utilisé dans plusieurs cellules qui sont espacées les unes des autres de

plus d'un écart prédéterminé, comprenant : une première petite cellule (30) formée dans une cellule radio par une première antenne (10<sub>1</sub>) prévue dans une station de base ; et une seconde petite cellule (20) qui est plus petite que la première petite cellule (30), formée dans la première petite cellule (30) par une seconde antenne (10<sub>2</sub>) prévue dans une station de base ; dans lequel l'écart entre les secondes petites cellules utilisant le même canal est plus petit que l'écart entre les premières petites cellules utilisant le même canal, caractérisé en ce que les première et seconde antennes sont prévues dans la même station de base, les première et seconde petites cellules ayant des canaux de commande respectifs, et les communications entre un poste mobile et une station de base étant effectuées en utilisant le canal de communication ou de commande de l'une des première et seconde petites cellules ayant le niveau reçu le plus élevé quand il est reçu et mesuré au niveau du poste mobile ou de la station de base.

2. Système de communication mobile selon la revendication 1, dans lequel chaque première antenne (10<sub>1</sub>) et seconde antenne (10<sub>2</sub>) est une antenne à faisceau incliné ayant un angle d'inclinaison respectif de faisceau ( $\theta_{in}$ ,  $\theta_{out}$ ).

3. Système de communication mobile selon la revendication 1 ou 2, dans lequel la puissance d'entrée effective vers une antenne dépend de chaque antenne (10<sub>1</sub>, 10<sub>2</sub>) pour chaque petite cellule (20, 30).

4. Système de communication mobile selon l'une quelconque des revendications précédentes, dans lequel la première petite cellule (30) et la seconde petite cellule (20) ont des structures omnidirectionnelles.

5. Système de communication mobile selon l'une quelconque des revendications 1 à 3, dans lequel la première petite cellule (30) et la seconde petite cellule (20) ont des structures sectorisées.

6. Système de communication mobile selon l'une quelconque des revendications 1 à 3, dans lequel la première petite cellule (30) a une structure sectorisée et la seconde petite cellule (20) a une structure omnidirectionnelle.

7. Système de communication mobile selon l'une quelconque des revendications précédentes, dans lequel la comparaison des niveaux reçus des deux canaux concernant chaque petite cellule (30, 20) et la sélection des petites cellules sont effectuées dans un poste mobile.

8. Système de communication mobile selon la revendication 7, dans lequel la sélection des petites cellules (30, 20) est effectuée sur la base du niveau reçu d'un canal de commande prévu pour chaque petite cellule. 5
9. Système de communication mobile selon l'une quelconque des revendications 1 à 6, dans lequel la comparaison des niveaux reçus de deux canaux concernant chaque petite cellule et la sélection de 10 petites cellules sont effectuées dans une station de base.
10. Système de communication mobile selon la revendication 9, dans lequel la sélection des petites cellules (30, 20) est effectuée dans une station de 15 base en fonction du niveau reçu d'un canal de commande commun à chaque petite cellule.
11. Système de communication mobile selon la revendication 9, dans lequel la sélection des petites cellules (30, 20) est effectuée dans une station de 20 base sur la base du niveau reçu d'un canal de parole.
12. Système de communication mobile selon l'une quelconque des revendications précédentes, dans lequel une troisième antenne forme une troisième 25 petite cellule dans la seconde petite cellule, un troisième canal de parole et un troisième canal de commande sont prévus, et les communications 30 sont effectuées en utilisant le niveau de réception le plus élevé des trois canaux.
13. Système de communication mobile selon l'une quelconque des revendications précédentes dans lequel, quand tous les canaux d'une seconde petite cellule sont complets et que certains des canaux d'une première petite cellule sont disponibles, un 35 canal d'une première petite cellule est affecté à un poste mobile qui se trouve dans une seconde petite cellule. 40

45


50

55




*Fig. 1*

PRIOR ART

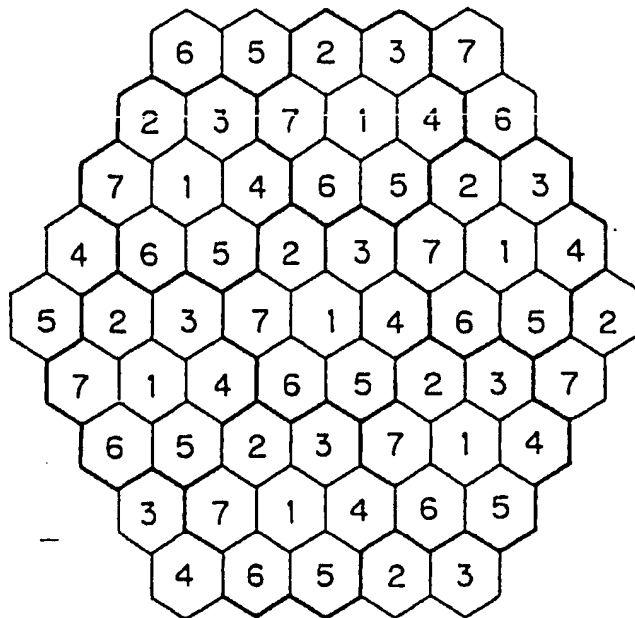


*Fig. 2*

PRIOR ART

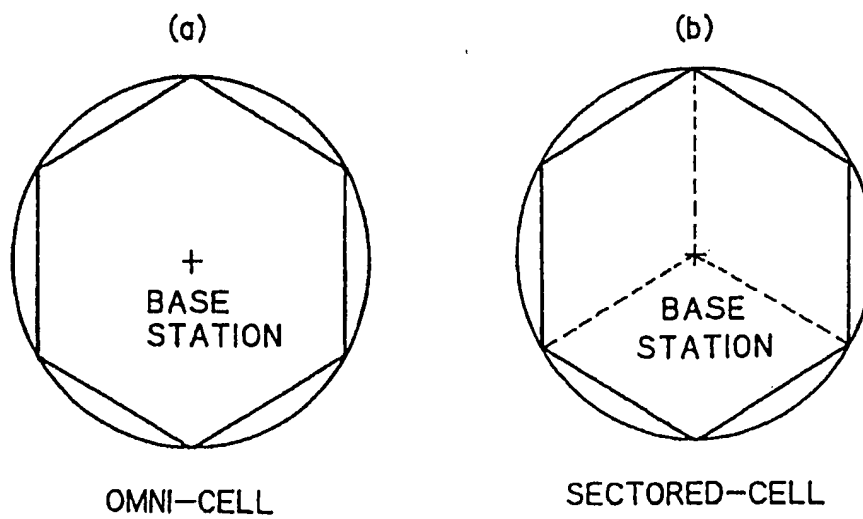

*Fig. 3*

PRIOR ART

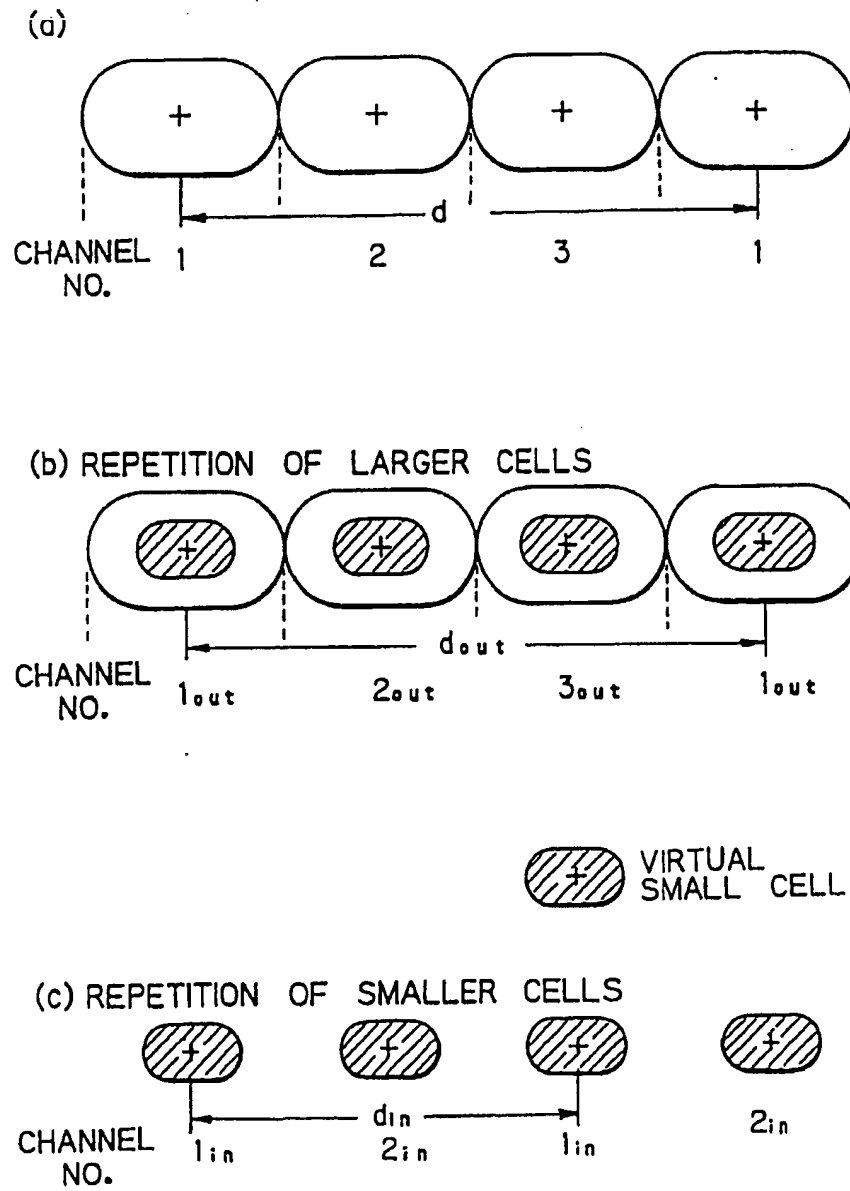

*Fig. 4*  
PRIOR ART

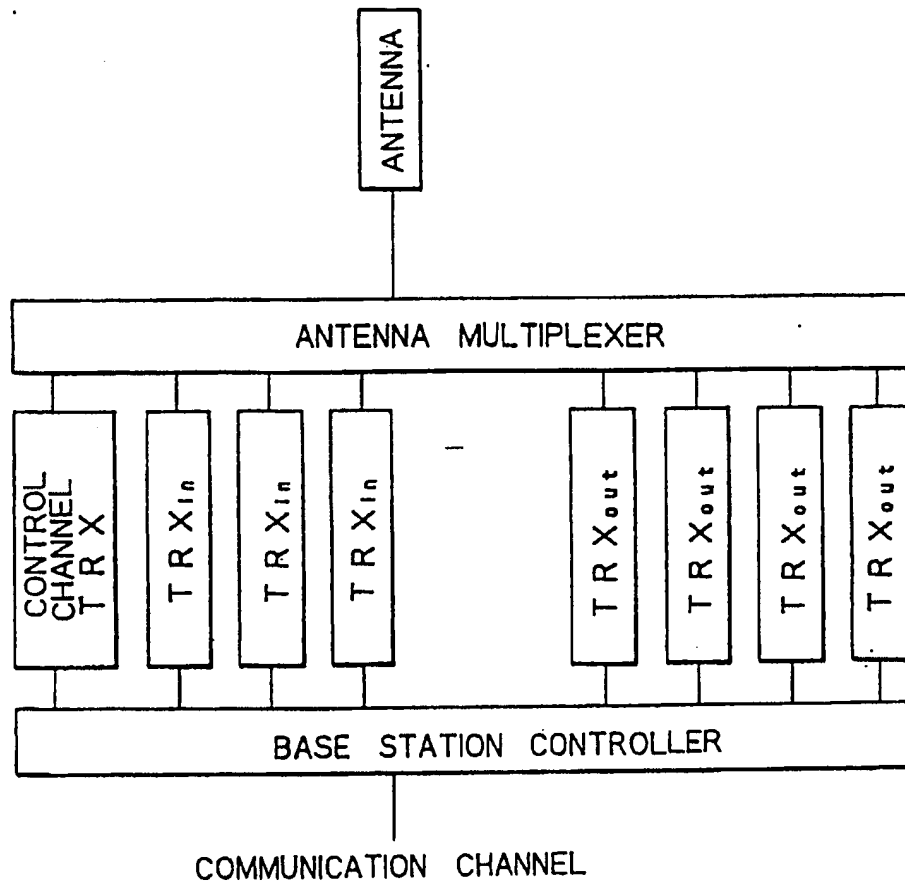


Fig. 5A

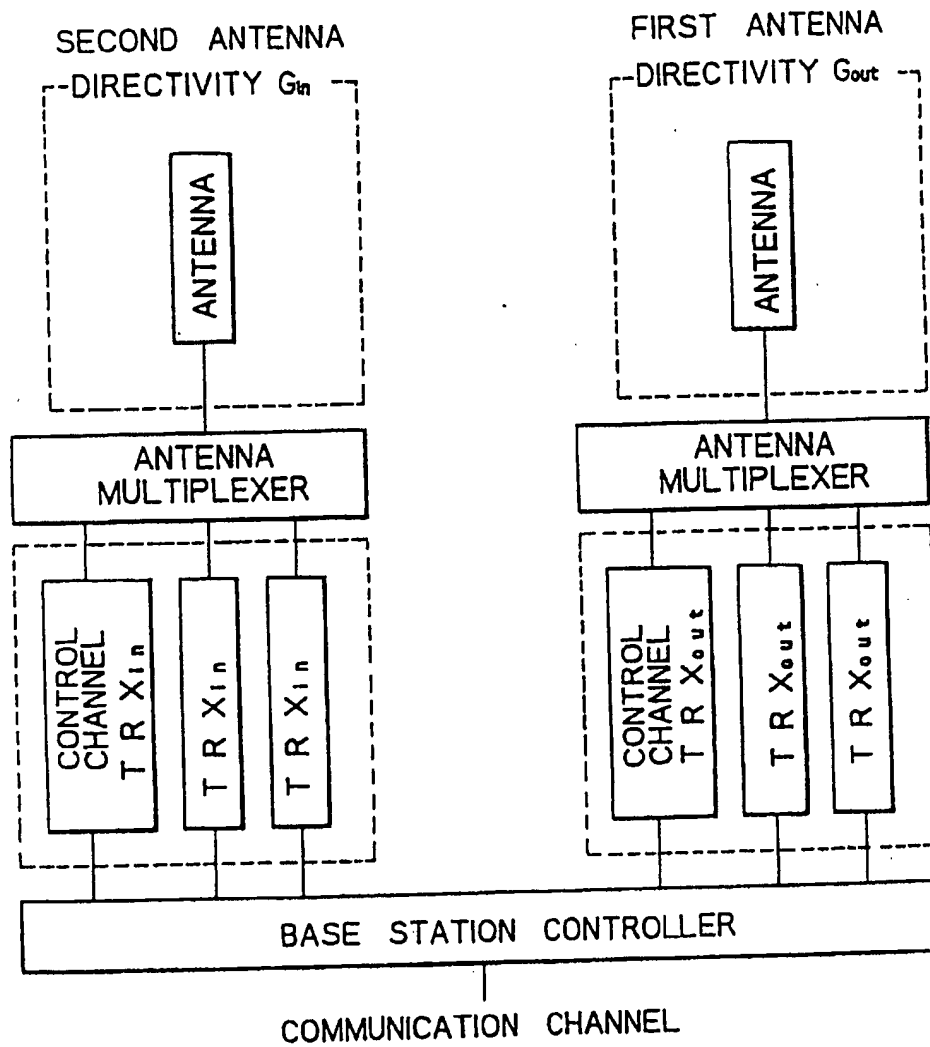


Fig. 5B

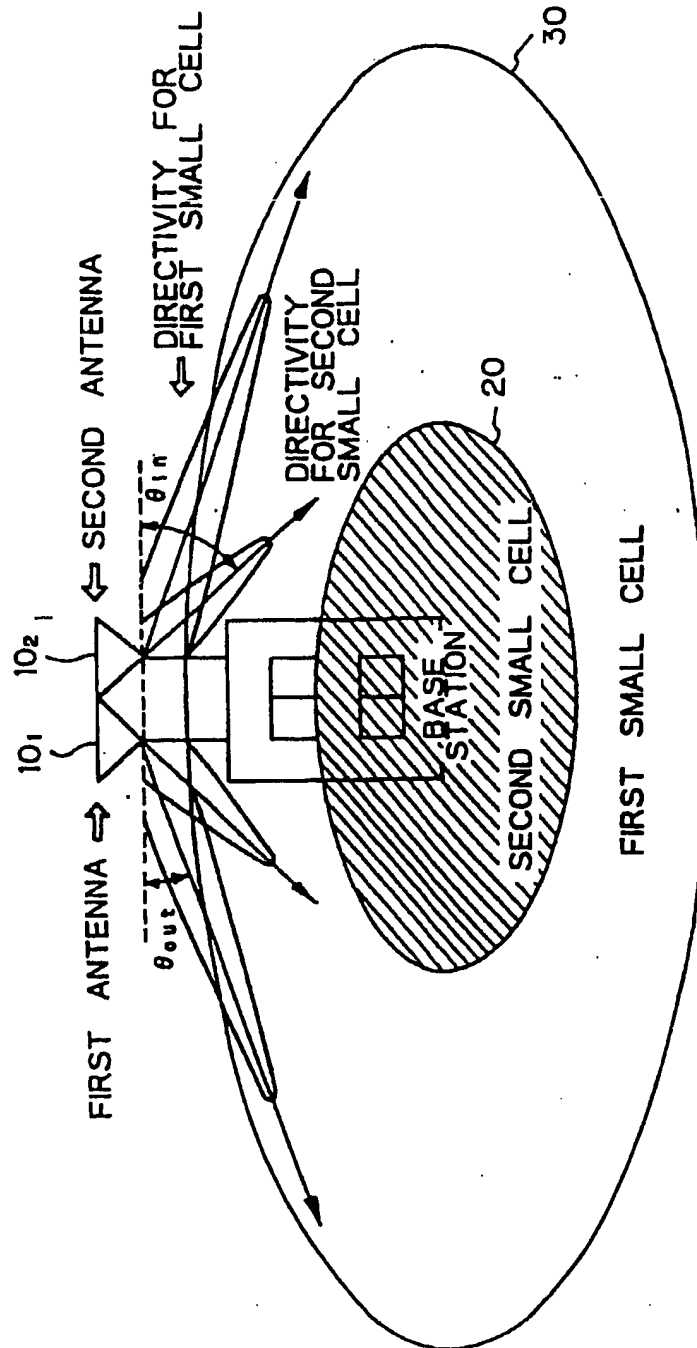


Fig. 5C

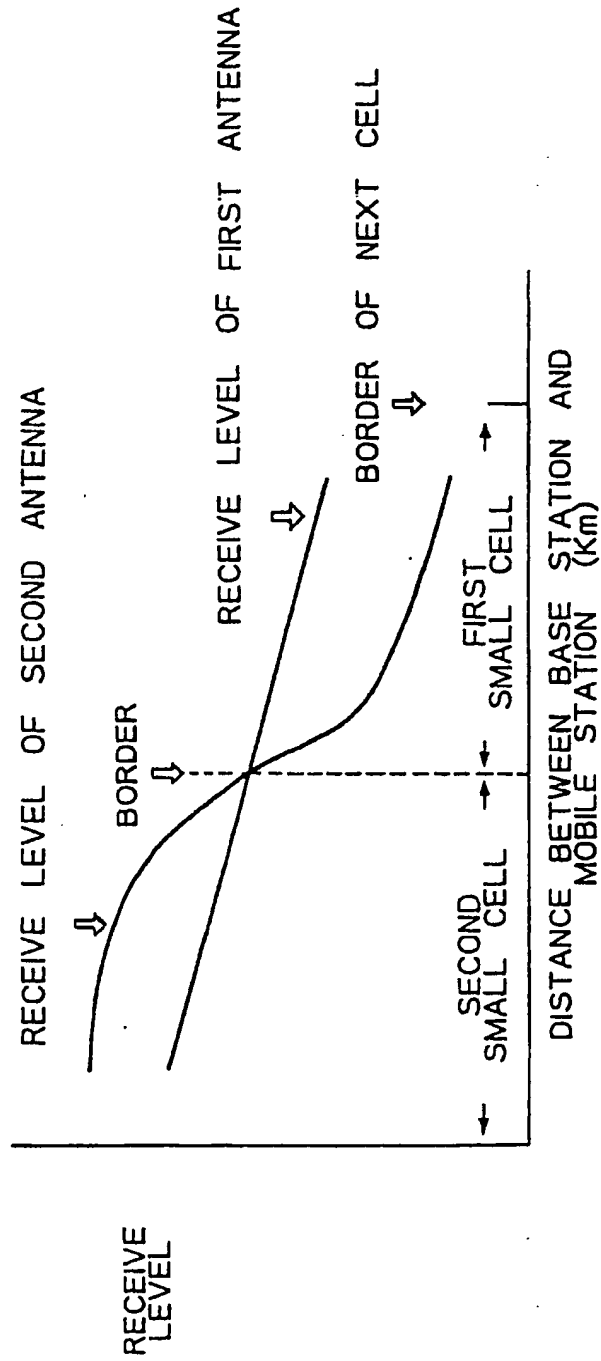


Fig. 5D



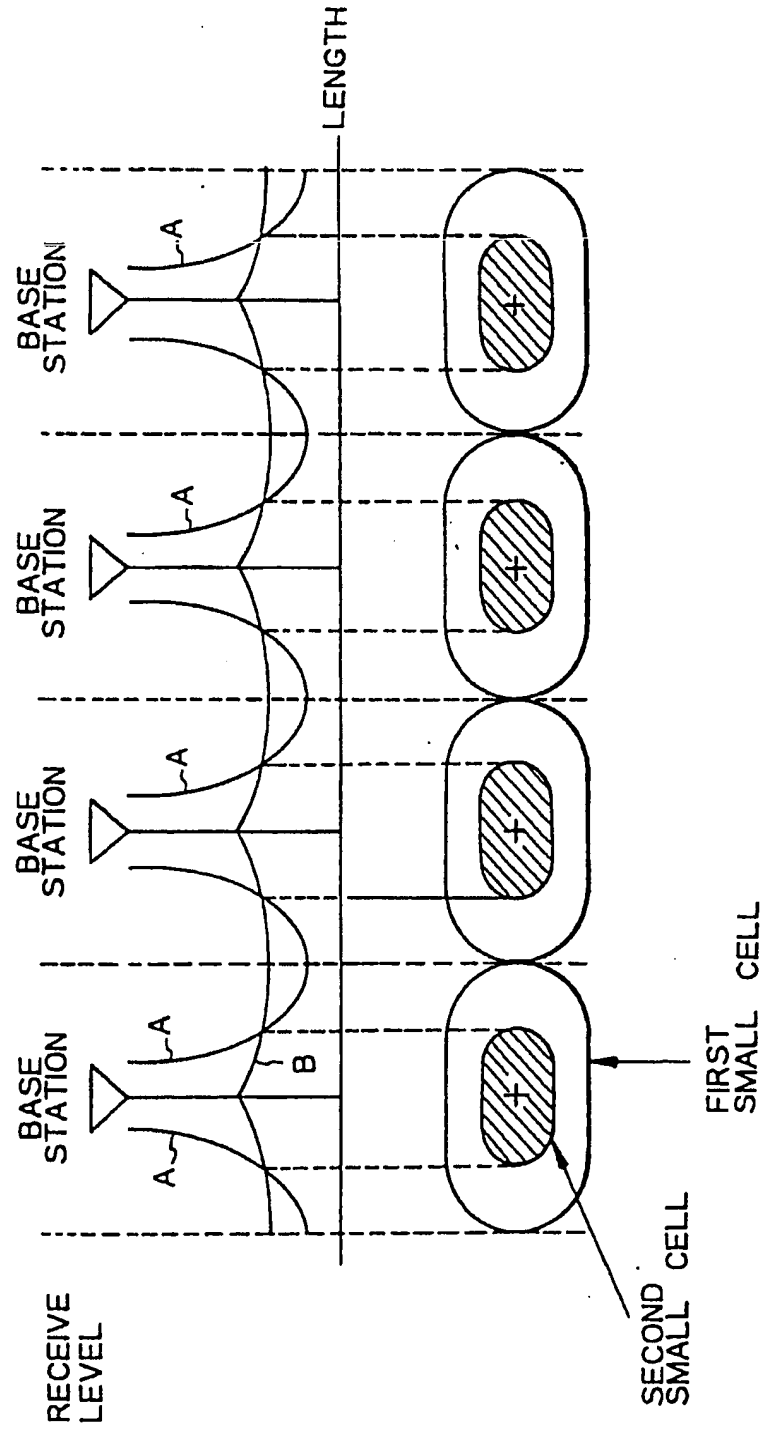


Fig. 6A



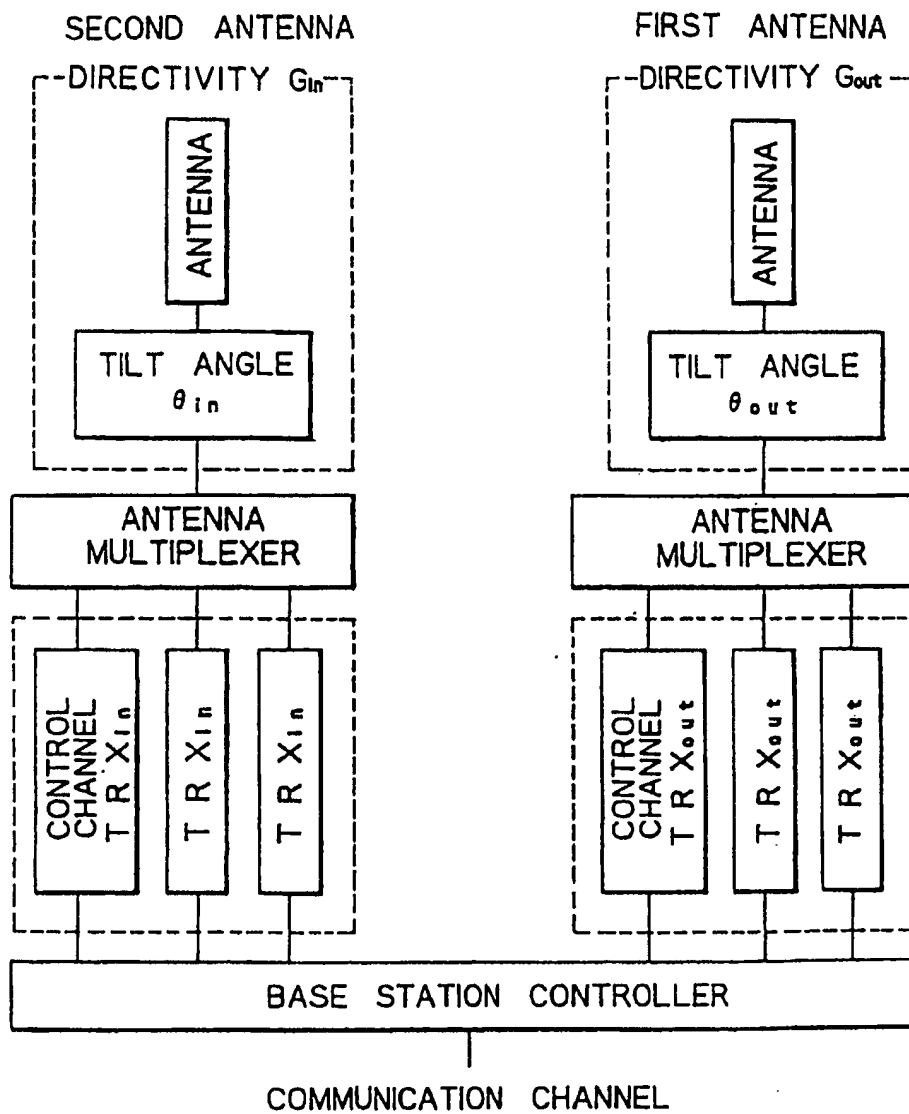

*Fig. 6B*

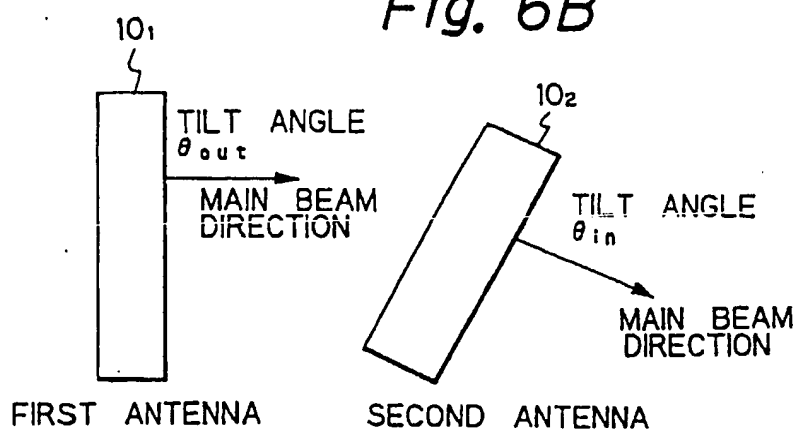

*Fig. 6C*

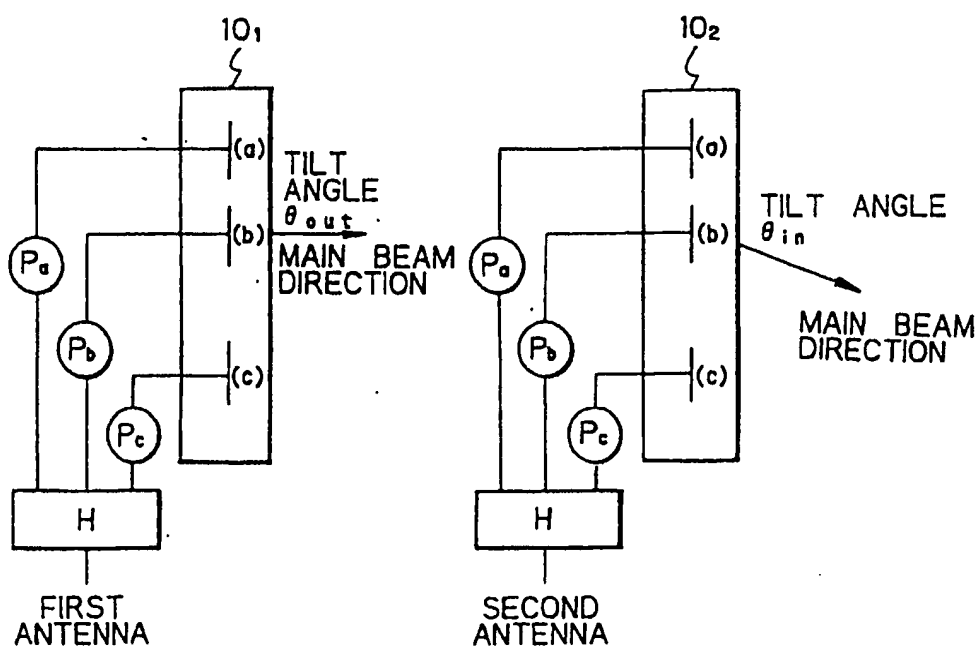


Fig. 7A




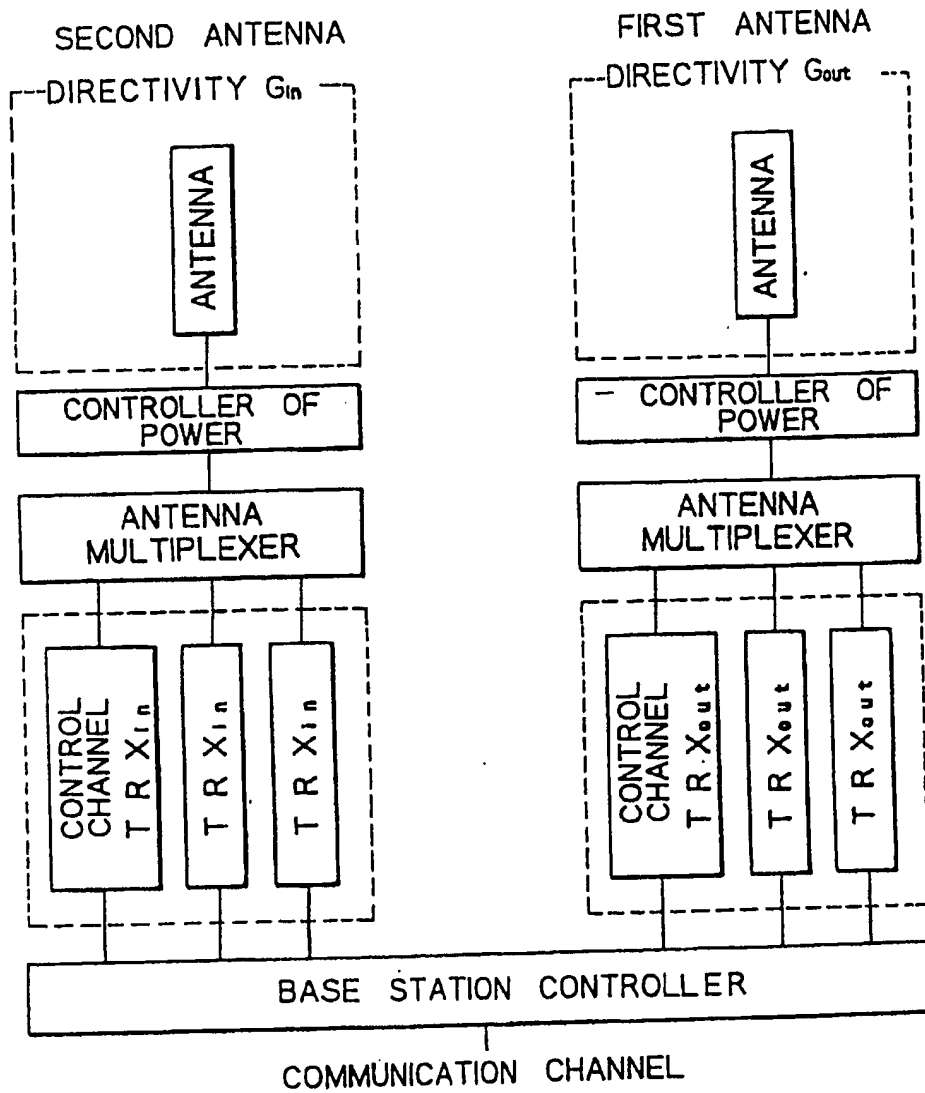



Fig. 7B

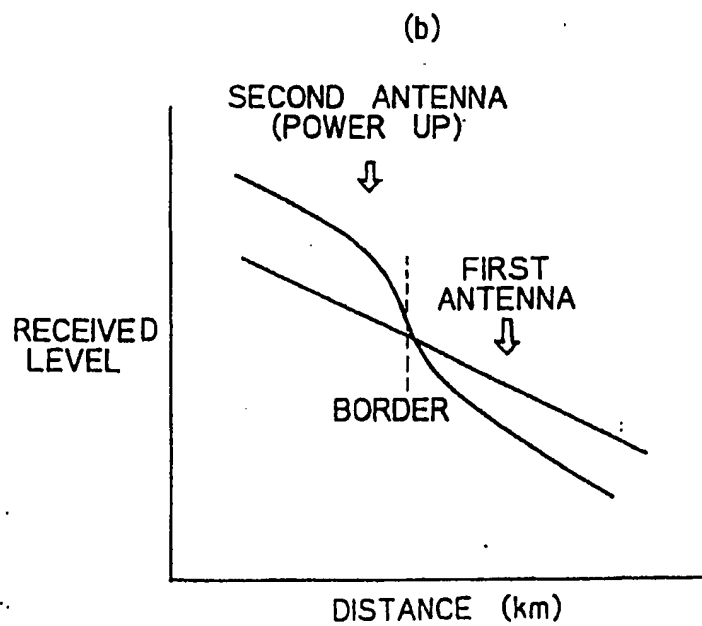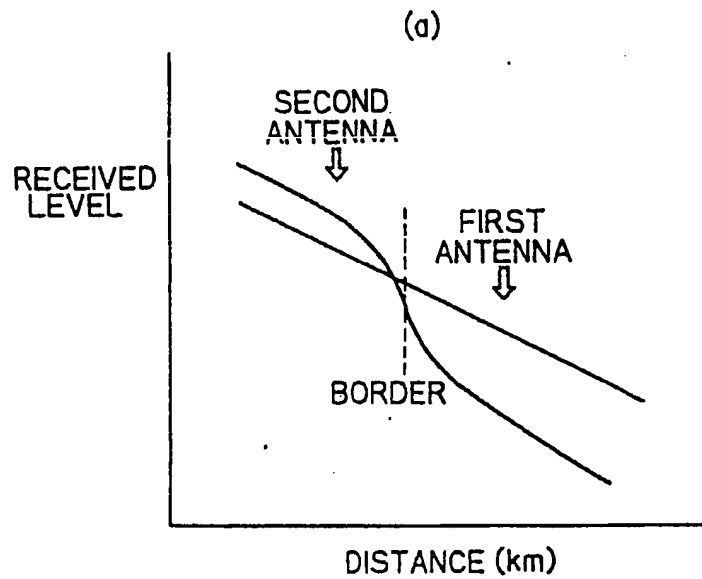


*Fig. 8*

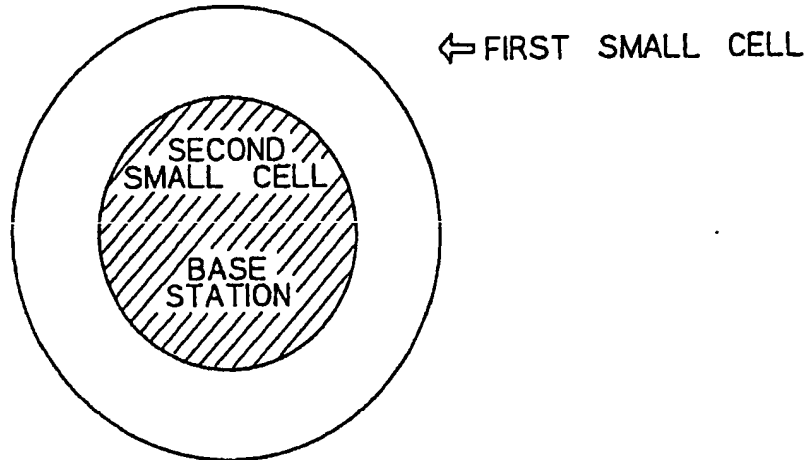

*Fig. 9*

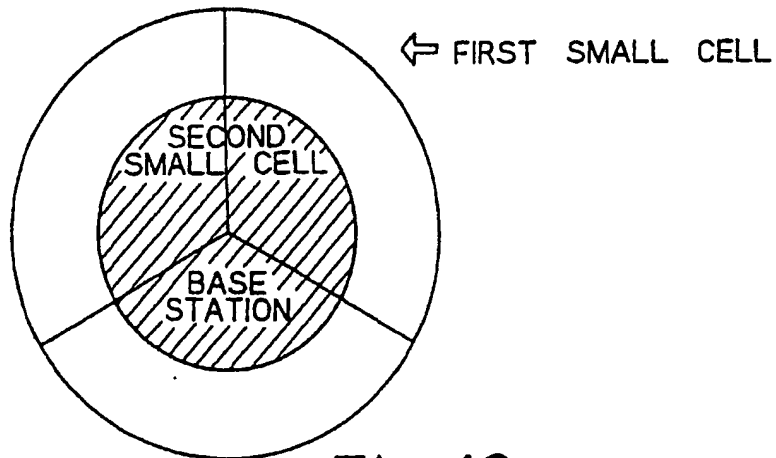

*Fig. 10*

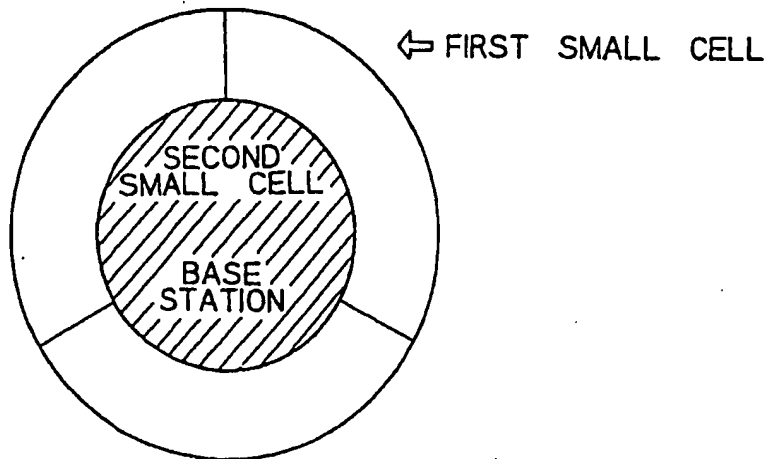

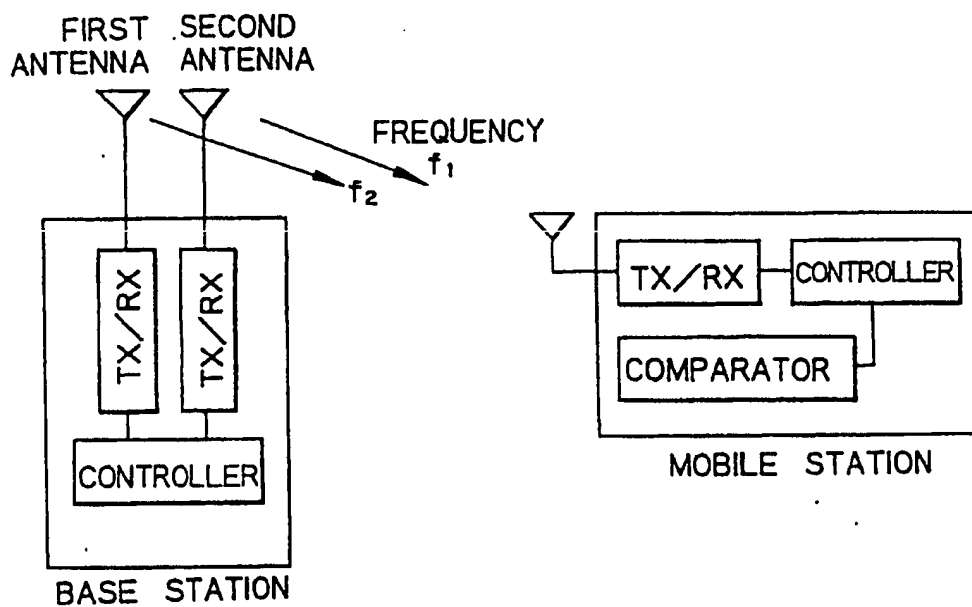
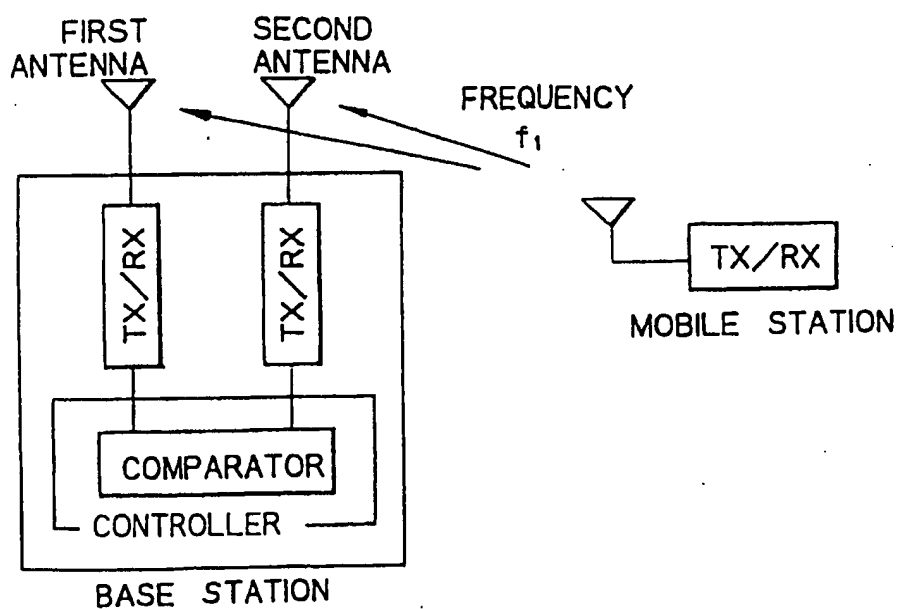
*Fig. 11**Fig. 12*

Fig. 13

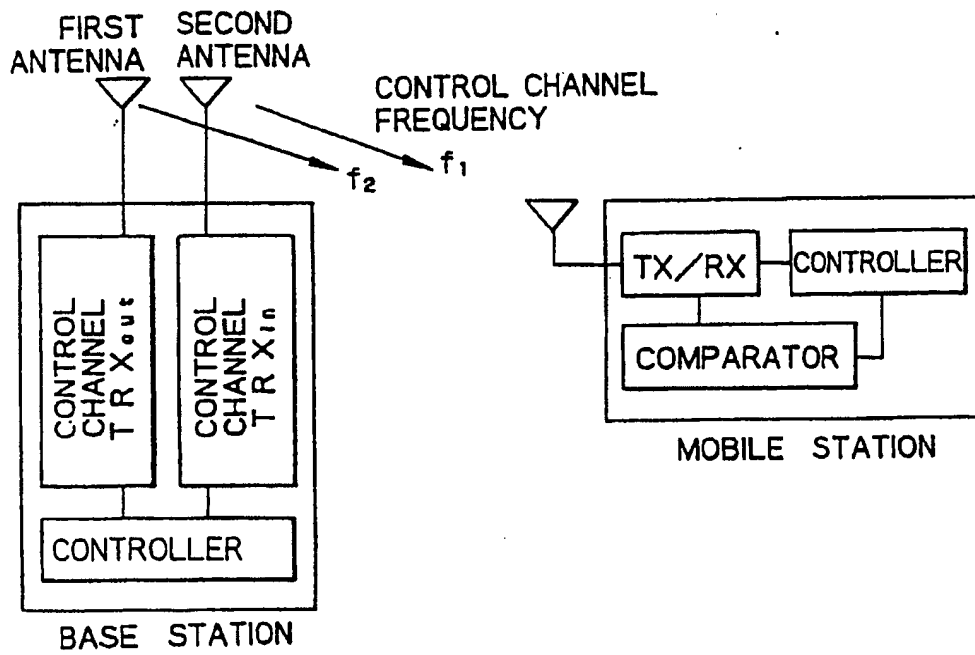


Fig. 14A

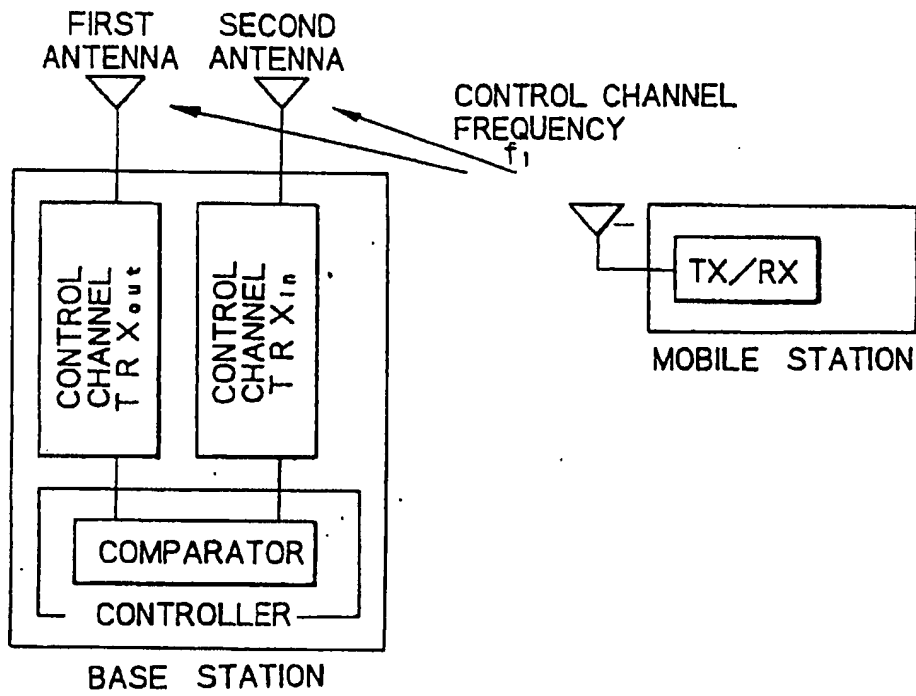


Fig. 14B

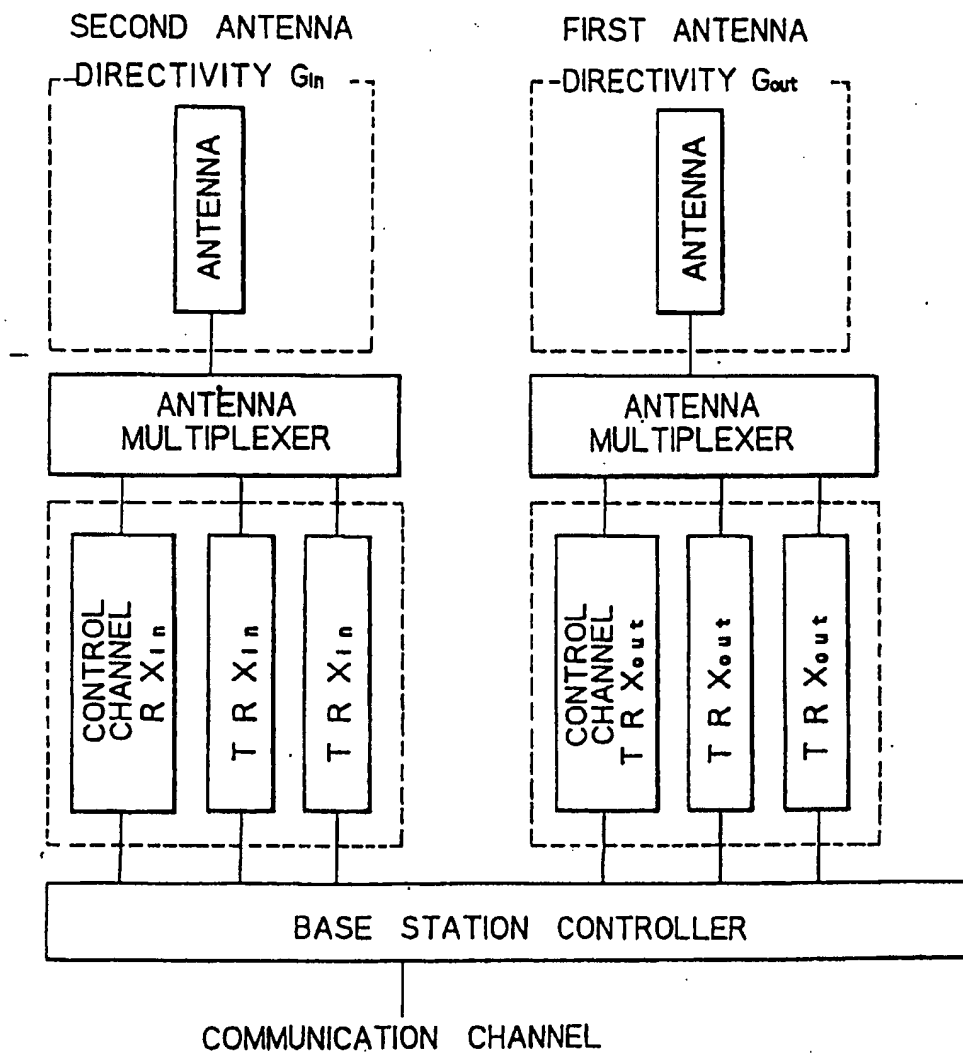




Fig. 14C

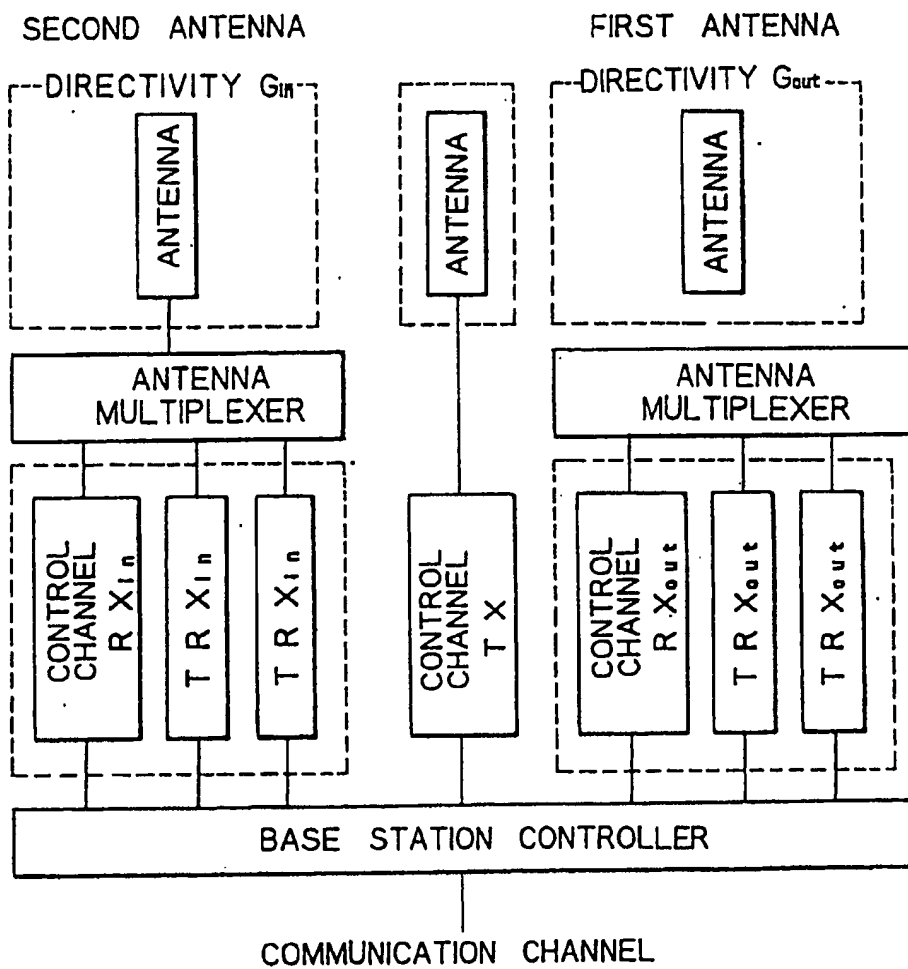


Fig. 15

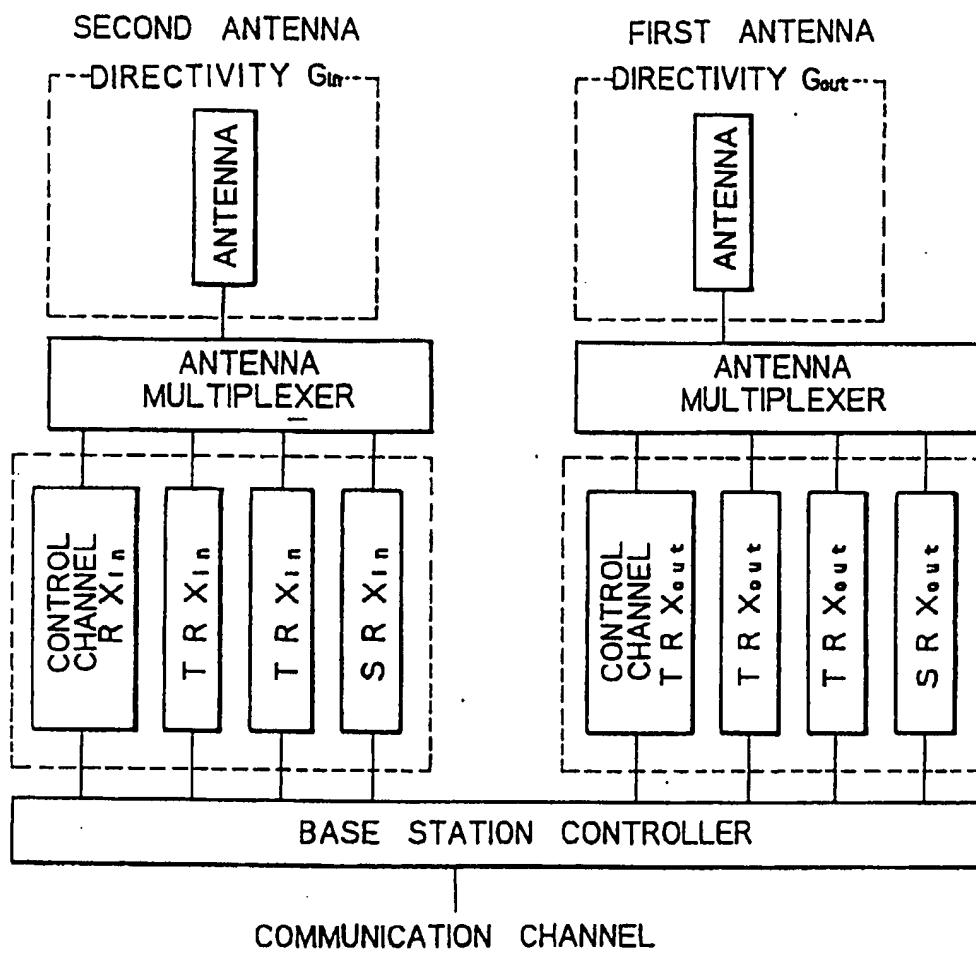


Fig. 16A

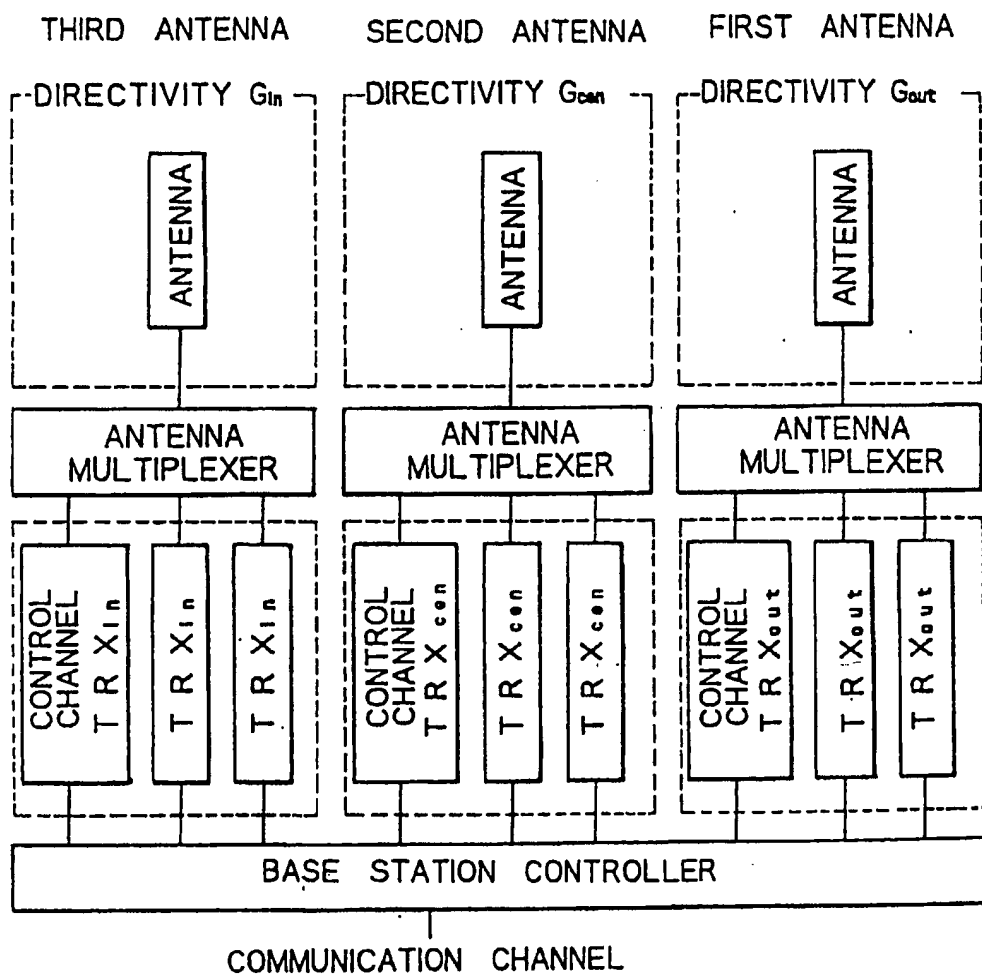


Fig. 16B

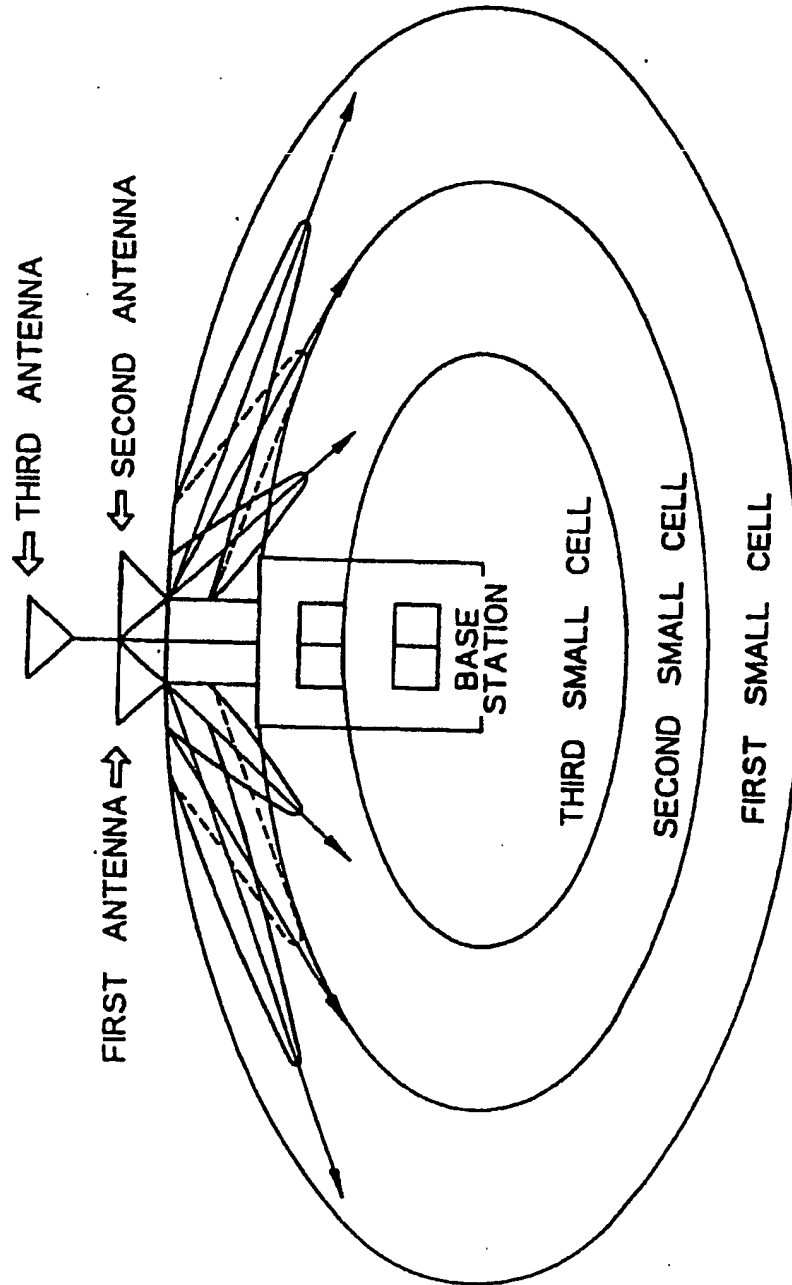


Fig. 16C

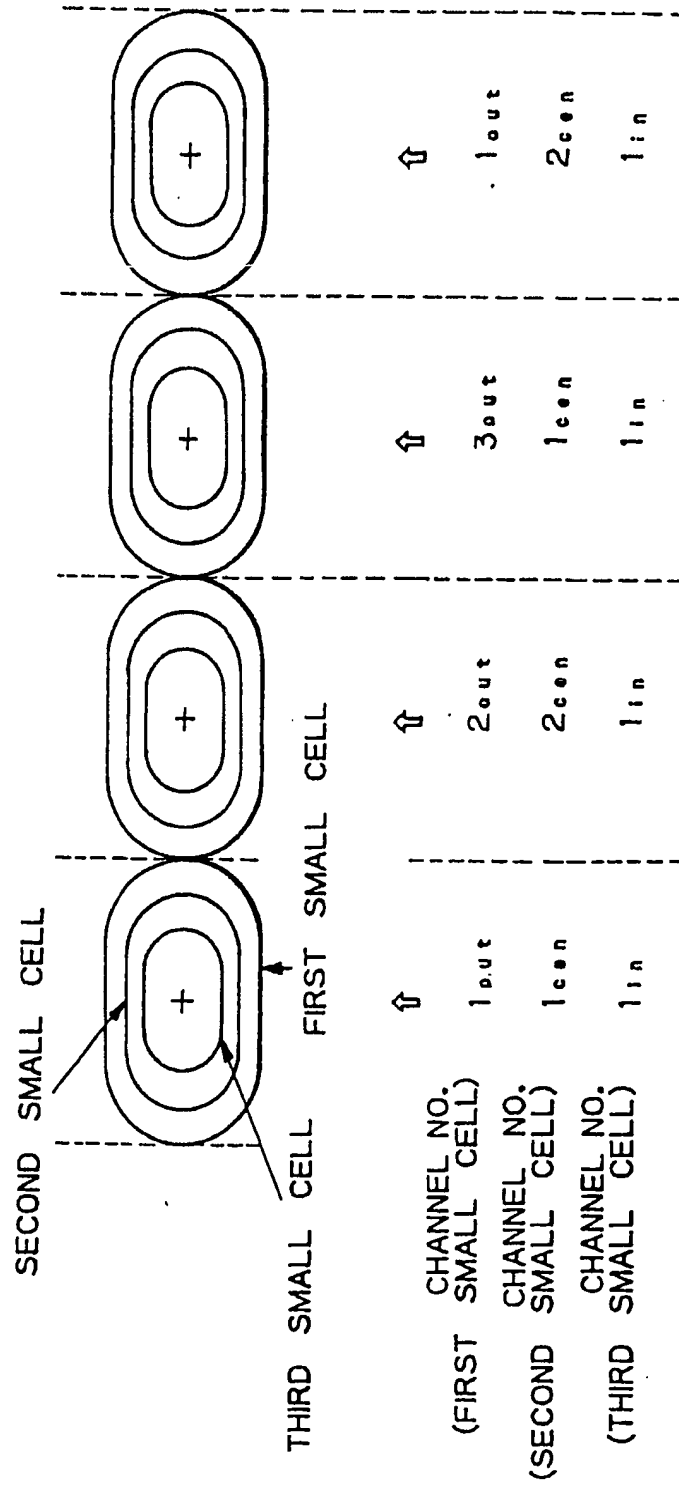


Fig. 17

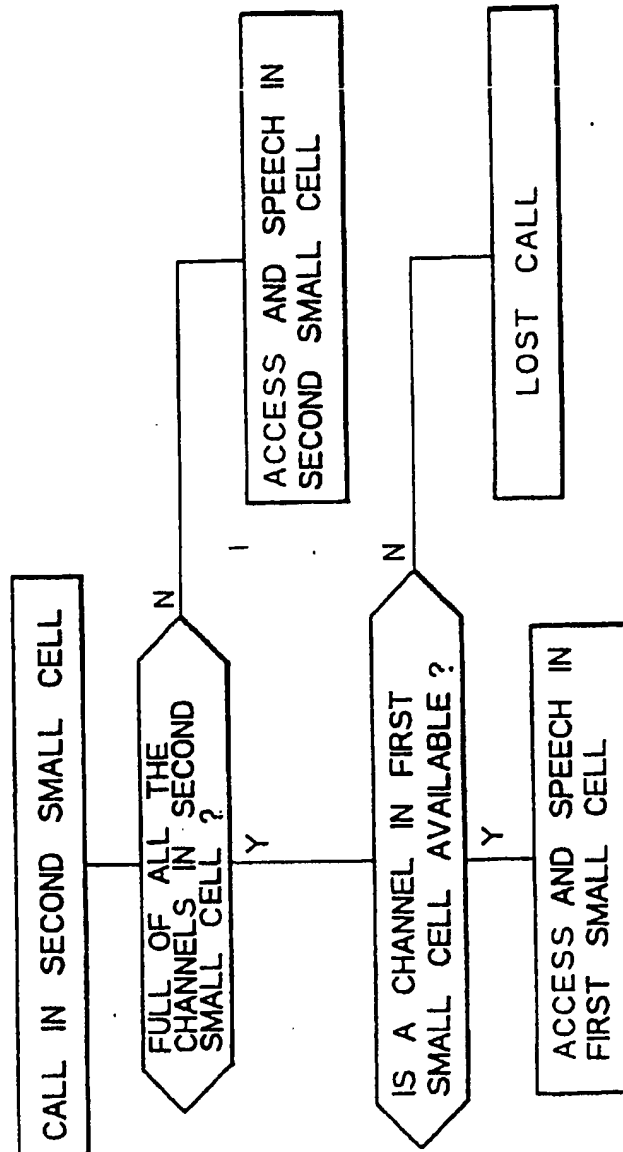


Fig. 18

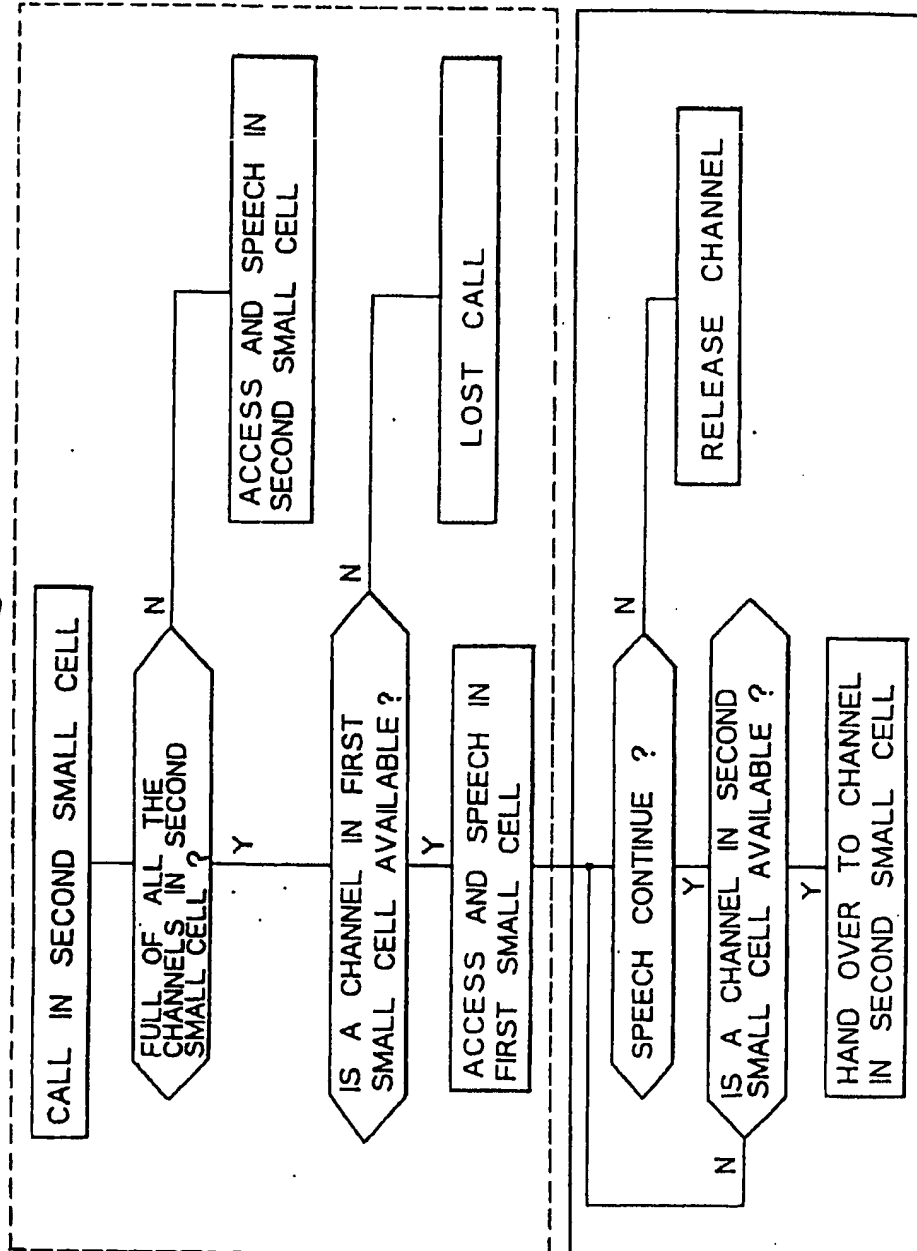


Fig. 19

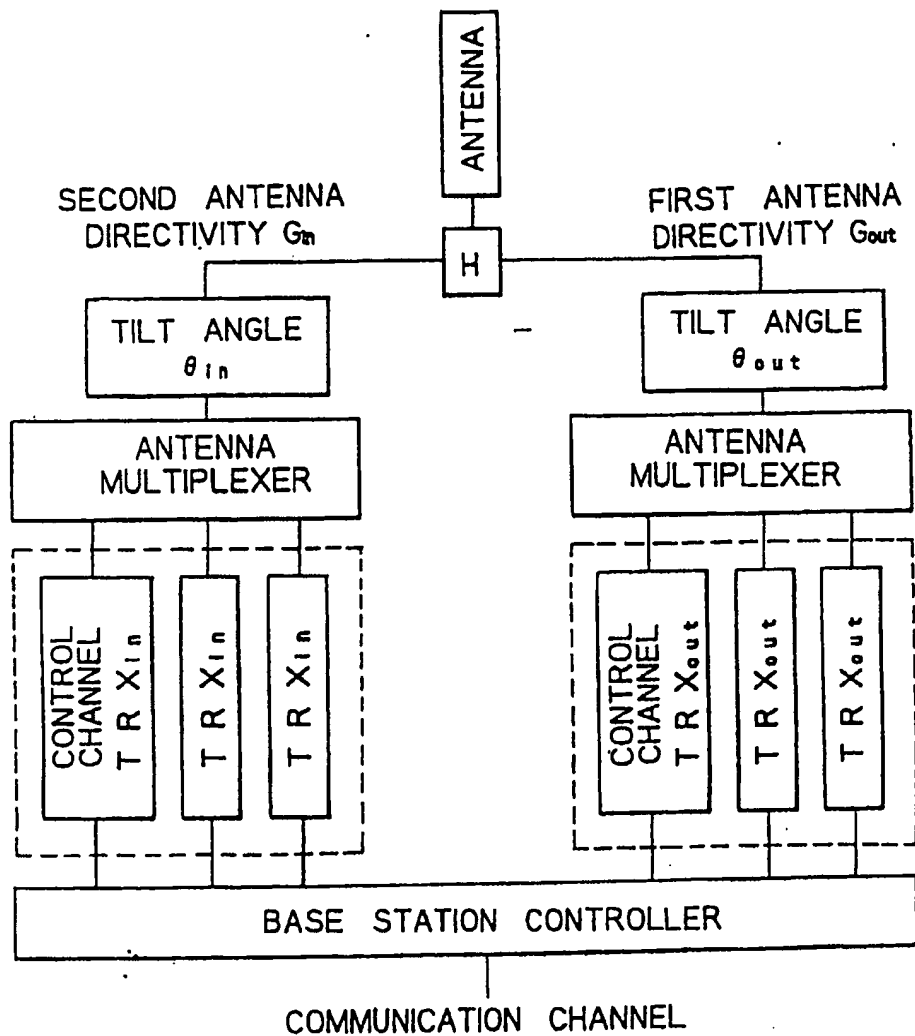




Fig. 20

